



Huawei P9 Rear Camera Replacement

Replace the camera in your Huawei P9 smartphone.

Written By: Dominik Schnabelrauch



INTRODUCTION

Use this guide to replace the camera in your Huawei P9 smartphone.

TOOLS:

- [SIM Card Eject Tool](#) (1)
 - [Spudger](#) (1)
 - [Tweezers - Pro/ESD/Angled](#) (1)
 - [Phillips #000 Screwdriver](#) (1)
 - [iSclack](#) (1)
 - [P2 Pentalobe Screwdriver iPhone](#) (1)
-

Step 1 — Back Cover




- First switch off your phone and remove the SIM card tray.
- Unscrew the two Pentalobe P2 screws located at the bottom next to the device's USB C port.
- ⓘ If the screen is cracked you might want to use some tape to protect your eyes from glass shreds and get a better grip to open the phone.

Step 2




- Use an iSclack or a suction handle to separate the display unit from the rear panel.
- ⚠ Don't remove the rear panel completely yet. There is a cable connected to it! It is running from the finger print sensor to the display unit.

Step 3 — finger print sensor

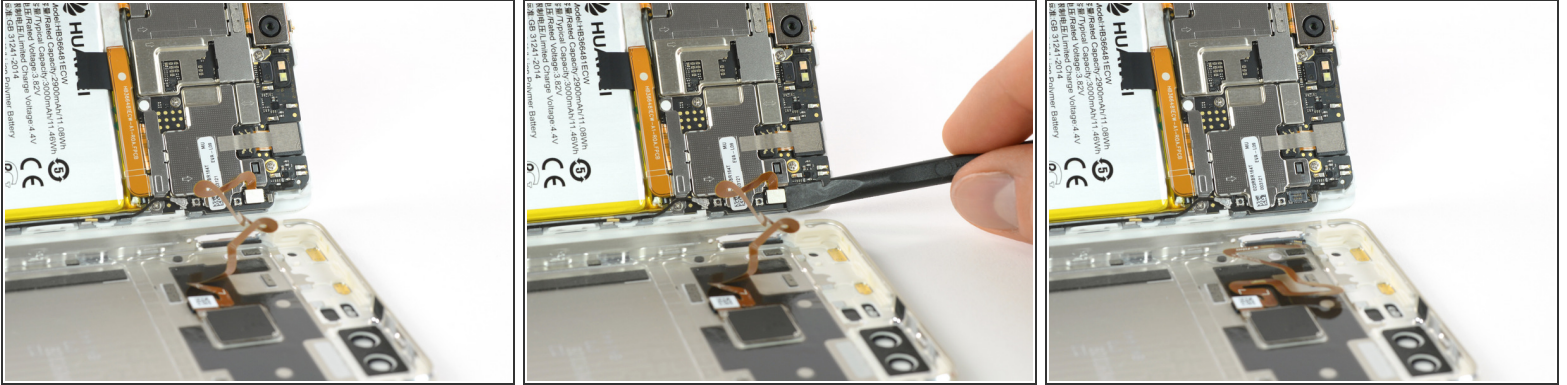

- Disconnect the finger print sensor using a spudger.

Step 4 — Rear Camera

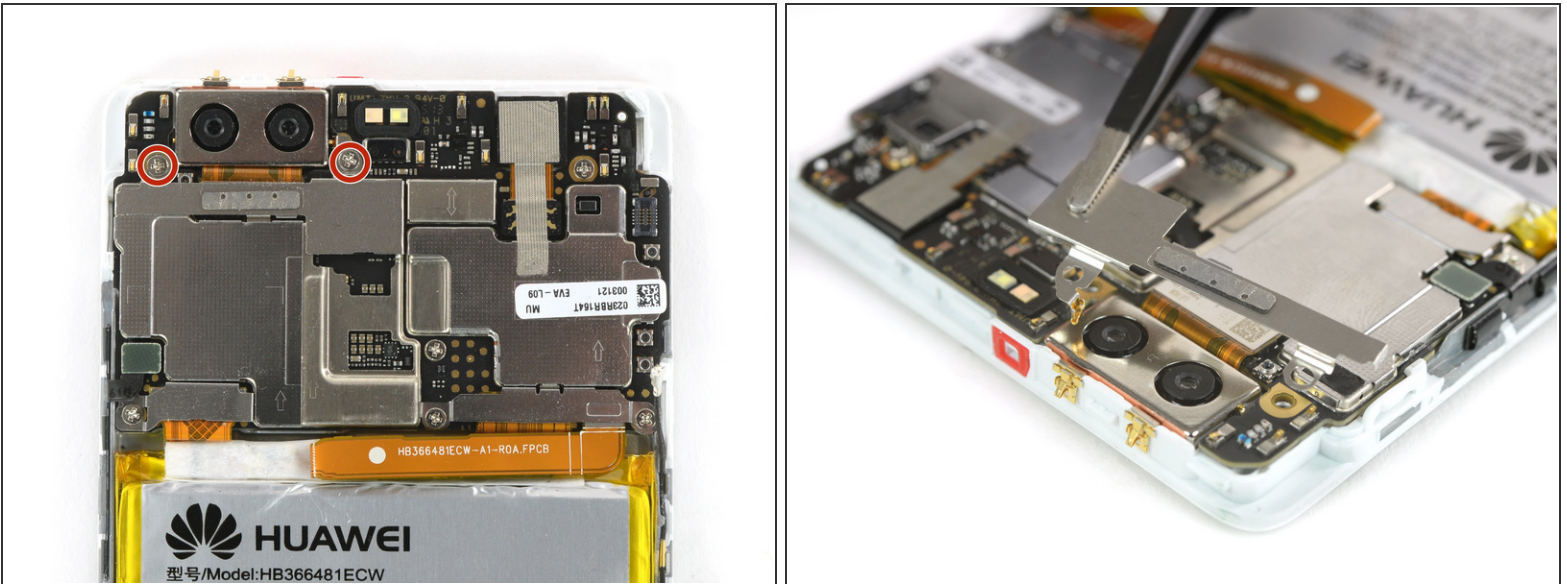

- Undo the two Phillips #000 screws.
- Remove the bracket.
- ⓘ Mind the connector underneath.

Step 5



- Release the connector.
- Loosen the camera from the motherboard and take it away.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-10-25 06:32:04 AM.